

DATA SHEET

FortiAnalyzer

Security-Driven Analytics & Log Management

FortiAnalyzer provides deep insights into advanced threats through **Single-Pane Orchestration, Automation & Response** for your entire attack surface to reduce risks and improve your organization's overall security.

Integrated with **Fortinet's Security Fabric**, FortiAnalyzer simplifies the complexity of analyzing and monitoring new and emerging technologies that have expanded the attack surface, and delivers **end-to-end visibility**, helping you identify and eliminate threats.



Advanced Threat Detection & Correlation

allows Security & Network teams to immediately identify and respond to network security threats across the infrastructure.




Automated Workflows & Compliance

Reporting provides customizable dashboards, reports and advanced workflow handlers for both Security & Network teams to accelerate workflows & assist with regulation and compliance audits.



Scalable Log Management collects logs from FortiGate, FortiClient, FortiManager, FortiSandbox, FortiMail, FortiWeb, FortiAuthenticator, Generic syslog and others. Deploy as an individual unit or optimized for a specific operation and scale storage based on retention requirements.

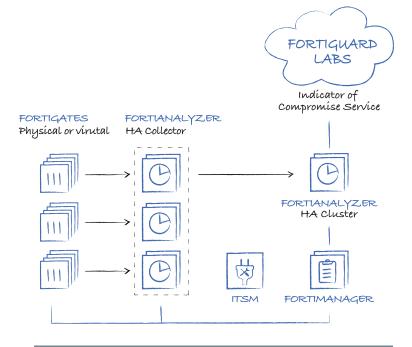

Key Features

End-to-end visibility

Event correlation, threat detection and Indicator of Compromise
 (IOC) service reduce time-to-detect and identity threats

Fortinet Security Fabric integration

 Correlates with logs from FortiClient, FortiSandbox, FortiWeb, and FortiMail for deeper visibility and critical network insights

Enterprise-grade high availability

Automatically back-up FortiAnalyzer DB's (up to 4 node cluster)
 that can be geographically dispersed for disaster recovery

Security automation

 Reduce complexity and leverage automation via REST API, scripts, connectors, and automation stitches to expedite security response

Multi-tenancy and administrative domains (ADOMs)

 Separate customer data and manage domains leveraging ADOMs to be compliant and operationally effective

Flexible deployment options & archival storage

 Supports deployment of appliance, VM, hosted or cloud. Use AWS, Azure or Google to archive logs as a secondary storage

Feature Highlights

Security Operations Center (SOC)

FortiAnalyzer's SOC management center helps secure your overall network by providing actionable views of log and threat data. Protect your network, web sites, applications, databases, servers and data centers, and other technologies, with centralized monitoring, awareness of the threats, events and network activity, using predefined and customized dashboards delivered through a single-pane-of-glass interface for easy integration into your Security Fabric.

Incident Detection & Response


FortiAnalyzer's Automated Incident Response capability improves Management & Analytics with a focus on event management and identification of compromised endpoints. Improved default and custom event handlers can be used to detect malicious and suspicious activities on the spot. Integration of events with the FOS automation framework for automated actions such as endpoint quarantine or blacklist IPs. Incident detection and tracking, as well as evidence collection and analysis, are streamlined through integration with ITSM platforms, helping to bridge gaps in your Security Operations Center and reinforce your Security Posture.

Event handlers enable quick detection, automated correlation and connected remediation with incident management to simplify log analysis and threat identification across your Fortinet Security Fabric. Create event handlers for FortiGate, FortiCarrier, FortiCache, FortiMail, FortiManager, FortiWeb, FortiSandbox devices, and syslog servers. Define what messages to extract from logs and display in events and send alerts for event handlers via email address, webhook, SNMP community, or syslog server.



Indicators of Compromise

The Indicators of Compromise (IOC) summary shows end users with suspicious web usage compromises. It provides information such as end users' IP addresses, hostname, group, OS, overall threat rating, a Map View, and a number of threats that you can drill down to view the details. Analysts can re-scan historical logs for threat hunting, and identify threats based on new intelligence. To generate the Indicators of Compromise, FortiAnalyzer checks web filter, DNS and traffic logs of each end-user against its threat database. When a threat match is found, a threat score is given to the end-user. FortiAnalyzer aggregates the threat scores of an end-user and gives its verdict of the end user's overall Indicators of Compromise. The Indicators of Compromise summary is produced through logs from the FortiGate devices and FortiAnalyzer subscription to FortiGuard to keep its local threat database synced with the FortiGuard threat database.

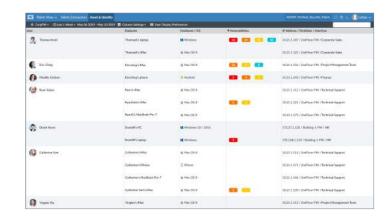

Reports

FortiAnalyzer provides 39+ built-in templates that are ready to use, with sample reports to help identify the right report for you. You can generate custom data reports from logs by using the Reports feature. Run reports on-demand or on a schedule with automated email notifications, uploads and an easy to manage calendar view. Create custom reports with the 300+ built-in charts and datasets ready for creating your custom reports, with flexible report formats include PDF, HTML, CSV, and XML.



Feature Highlights

Log Forwarding for Third-Party Integration


You can forward logs from a FortiAnalyzer unit to another FortiAnalyzer unit, a syslog server, or a Common Event Format (CEF) server. The client is the FortiAnalyzer unit that forwards logs to another device. The server is the FortiAnalyzer unit, syslog server, or CEF server that receives the logs. In addition to forwarding logs to another unit or server, the client retains a local copy of the logs. The local copy of the logs is subject to the data policy settings for archived logs. Logs are forwarded in real-time or near real-time as they are received. Forwarded content files include: DLP files, antivirus quarantine files, and IPS packet captures.

Analyzer-Collector Mode

You can deploy in Analyzer mode and Collector mode on different FortiAnalyzer units and make the units work together to improve the overall performance of log receiving, analysis, and reporting. When FortiAnalyzer is in Collector mode, its primary task is forwarding logs of the connected devices to an Analyzer and archiving the logs. The Analyzer offloads the log-receiving task to the Collector so that the Analyzer can focus on data analysis and report generation. This maximizes the Collector's log receiving performance. (Figure 4)

Multi-Tenancy with Flexible Quota Management

Time-based archive/analytic log data policy per Administrative Domain (ADOM), automated quota management based on the defined policy, and trending graphs to guide policy configuration and usage monitoring.



FortiAnalyzer-VM

FortiAnalyzer-VM integrates network logging, analysis, and reporting into a single system, delivering increased knowledge of security events throughout a network. Utilizing virtualization technology, FortiAnalyzer-VM is a software-based version of the FortiAnalyzer hardware appliance and is designed to run on many virtualization platforms. It offers all the features of the FortiAnalyzer hardware appliance.

FortiAnalyzer-VM provides organizations of any size with centralized security event analysis, forensic research, reporting, content archiving, data mining, malicious file quarantining and vulnerability assessment. Centralized collection, correlation, and analysis of geographically and chronologically diverse security data from Fortinet appliances and third-party devices deliver a simplified, consolidated view of your security posture.

Specifications

FORTIANALYZER VIRTUAL APPLIANCES	FAZ-VM-BASE	FAZ-VM-GB1	FAZ-VM-GB5	FAZ-VM-GB25	FAZ-VM-GB100	FAZ-VM-GB500	FAZ-VM-GB2000
Capacity and Performance							
GB/Day of Logs	1 incl.*	+1	+5	+25	+100	+500	+2,000
Storage Capacity	500 GB	+500 GB	+3 TB	+10 TB	+24 TB	+48 TB	+100 TB
Devices/VDOMs (Maximum)	10,000	10,000	10,000	10,000	10,000	10,000	10,000
FortiGuard Indicator of Compromise (IOC)	Ø	ਂ	Ø	❷	ਂ	Ø	Ø
Hypervisor Requirements							
Hypervisor Support		VMware ESX/ESXi 5.0/5.1/5.5/6.0/6.5/6.7, Microsoft Hyper-V 2008 R2/2012/2012 R2/2016, Citrix XenServer 6.0+ and Open Source Xen 4.1+, KVM on Redhat 6.5+ and Ubuntu 17.04, Nutanix AHV (AOS 5.10.5), Amazon Web Services (AWS), Microsoft Azure, Google Cloud (GCP), Oracle Cloud Infrastructure (OCI), Alibaba Cloud (AliCloud)					
Network Interface Support (Minimum / Maximum)		1/4					
vCPUs (Minimum / Maximum)		2 / Unlimited					
Memory Support (Minimum / Maximum)	4 GB / Unlimited						

^{*} Unlimited GB/Day when deployed in collector mode

Specifications

	promise area or a structure	PORTER PROPERTY.		
	FORTIANALYZER 200F	FORTIANALYZER 300F	FORTIANALYZER 400E	
Capacity and Performance				
GB/Day of Logs	100	150	200	
Analytic Sustained Rate (logs/sec)*	3000	4500	6,000	
Collector Sustained Rate (logs/sec)*	4500	6,750	9,000	
Devices/VDOMs (Maximum)	150	180	200	
Max Number of Days Analytics**	40	28	30	
Options Supported				
FortiGuard Indicator of Compromise (IOC)	igoremsize		igoremsize	
lardware Specifications				
orm Factor	1 RU Rackmount	1 RU Rackmount	1 RU Rackmount	
Total Interfaces	2 x RJ45 GE	2 x RJ45 GE 2 x RJ45 GE, 2 x SFP		
torage Capacity	4 TB (1 x 4 TB)	8 TB (2 x 4 TB)	12 TB (4 x 3 TB)	
sable Storage (After RAID)	4 TB	4 TB	6 TB	
lemovable Hard Drives	No	No	Ø	
IAID Levels Supported	N/A	RAID 0/1	RAID 0/1/5/10	
RAID Type	N/A	Software	Software	
Default RAID Level	N/A	1	10	
ledundant Hot Swap Power Supplies	No	No No		
Dimensions				
leight x Width x Length (inches)	1.75 x 17.0 x 15.0	1.75 x 17.0 x 15.0	1.7 x 17.2 x 19.8	
leight x Width x Length (cm)	4.4 x 43.2 x 38.1	4.4 x 43.2 x 38.1 4.4 x 43.2 x 38.0		
Veight	17.1 lbs (7.8 kg)	18.9 lbs (8.6 kg)	31 lbs (14.1 kg)	
invironment				
C Power Supply	100-240V AC, 60-50 Hz	100-240V AC, 60-50 Hz	100-240V AC, 60-50 Hz	
Ower Consumption (Average / Maximum)	49W / 114W	65W / 130W	93W / 133W	
leat Dissipation	390 BTU/h	445 BTU/h	456 BTU/h	
perating Temperature	32-104° F (0-40° C)	32-104° F (0-40° C)	41-95°F (5-35°C)	
Storage Temperature	95–158° F (-35–70° C)	95–158° F (-35–70° C)	-40–140°F (-40–60°C)	
lumidity	20 to 90% non-condensing			
perating Altitude	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 9,842 ft (3,000 m)	
Compliance				
Safety Certifications	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/ cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CE	

^{*} Sustained Rate - maximum constant log message rate that the FAZ platform can maintain for minimum 48 hours without SQL database and system performance degradation.



^{**}is the max number of days if receiving logs continuously at the sustained analytics log rate. This number can increase if the average log rate is lower.

Specifications

	1 1 1 1			
	FORTIANALYZER 800F	FORTIANALYZER 1000F	FORTIANALYZER 2000E	
Capacity and Performance				
GB/Day of Logs	300	660	1,000	
Analytic Sustained Rate (logs/sec)*	8,250	20,000	30,000	
Collector Sustained Rate (logs/sec)*	12,000	30,000	45,000	
Devices/VDOMs (Maximum)	800	2000	2,000	
Nax Number of Days Analytics**	30	34	30	
Options Supported				
ortiGuard Indicator of Compromise (IOC)			igoremsize	
lardware Specifications				
orm Factor	1 RU Rackmount	2 RU Rackmount	2 RU Rackmount	
Total Interfaces	4 x GE, 2 x SFP	2x 10GbE RJ45, 2x 10GbE SFP+	4 x GE, 2 x SFP+	
Storage Capacity	16 TB (4 x 4 TB)	32 TB (8x 4 TB)	36 TB (12 x 3 TB)	
Isable Storage (After RAID)	8 TB	24	30 TB	
lemovable Hard Drives	Ø	Ø	⊘	
AID Levels Supported	RAID 0/1/5/10	RAID 0/1/5/6/10/50/60	RAID 0/1/5/6/10/50/60	
AID Type	Hardware / Hot Swappable	Hardware / Hot Swappable	Hardware / Hot Swappable	
efault RAID Level	10	50	50	
edundant Hot Swap Power Supplies				
imensions				
leight x Width x Length (inches)	1.75 x 17.44 x 22.16	3.5 x 17.2 x 25.6	3.5 x 17.2 x 25.6	
leight x Width x Length (cm)	4.4 x 44.3 x 56.3	8.9 x 43.7 x 65.0	8.9 x 43.7 x 64.8	
Veight	28.6 lbs (13.0 kg)	34 lbs (15.42 kg)	58 lbs (26.3 kg)	
invironment				
C Power Supply	100-240V AC, 60-50 Hz	100-240V AC, 60-50 Hz	100-240V AC, 60-50 Hz	
ower Consumption (Average / Maximum)	108W / 186W	192.5W / 275W	293.8W / 354W	
leat Dissipation	634 BTU/h	920 BTU/h	1840 BTU/h	
perating Temperature	32-104° F (0-40° C)	50-95°F (10 - 35°C)	50-95°F (10-35°C)	
torage Temperature	95–158° F (-35–70° C)	-40-140°F (-40-60°C)	-40–158°F (-40–70°C)	
lumidity	20 to 90% non-condensing	8–90% non-condensing	8–90% non-condensing	
perating Altitude	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	
Compliance				
Safety Certifications	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/ cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB	FCC Part 15 Class A, C-Tick, VCCI, CE, UL/ cUL, CB	

^{*} Sustained Rate - maximum constant log message rate that the FAZ platform can maintain for minimum 48 hours without SQL database and system performance degradation.

^{**}is the max number of days if receiving logs continuously at the sustained analytics log rate. This number can increase if the average log rate is lower.

Specifications

Serbay of Logs 3,000 5,000 8,300 10,000 100					
Capacity and Performance 3.000 5.000 8.300 Analysic Sustained Rate (logs/sec)* 42.000 60.000 100.000 Collector Sustained Rate (logs/sec)* 60.000 90.000 150.000 Devices/DOMS (Maximum) 4,000 10.000 10.000 Mox Number of Days Analytics** 30 38 60 Poptions Supported Section of Compromise (IOC) Sec		FORTIANALYZER 3000F	FORTIANALYZER 3500G	FORTIANALYZER 3700F	
Analytic Sustained Rate (logs/sec)* 42,000 60,000 100,000 Collector Sustained Rate (logs/sec)* 60,000 90,000 150,000 Devices/NDMs (Maximum) 4,000 10,000 10,000 Max Number of Days Analytics** 30 38 60 Portificand Indicator of Compromise (IOC) Secondary Secondary Secondary Form Factor 3 RU Rackmount 4 RU Rackmount 4 RU Rackmount 4 RU Rackmount Total Interfaces 4 x SE, 2 x SPH 2 x SEPH & 2 x SEP RB 2 x SPH + 2 x 10E Storage Capacity 48 B1 (6 x 118 + 48 B max) 95 B1 (24x 4 B) 24 B (6 x 148 SAS bD0) Usable Storage (After RAU) 4 2 TB 80 2 (6 TB Removable Hard Drives 9 9 9 9 RAID Levels Supported RAID 07/56/10/50/60 RAID 07/56/	Capacity and Performance				
Collector Sustained Rate (logs/sec)* 60,000 90,000 150,000 Devices VDOMs (Maximum) 4,000 10,000 10,000 Max Number of Days Analytics** 30 38 60 Options Supported Forticuard Indicator of Compromise (IOC) Image: Compromise (IOC)	GB/Day of Logs	3,000	5,000	8,300	
Devices NDOMS (Maximum) 4,000 10,000 10,000 10,000 Max Number of Days Analytics** 30 38 60 Options Supported 50 50 50 FortiGuard Indicator of Compromise (IOC) 50 50 50 Hardware Specifications 70 70 70 70 70 70 Hardware Specifications 70 70 70 70 70 70 70 7	Analytic Sustained Rate (logs/sec)*	42,000	60,000	100,000	
Max Number of Days Analytics** 30 38 60 Options Supported FortiGuard Indicator of Compromise (IOC) ✓ ✓ ✓ Hardware Specifications Very Commendation ✓ ✓ ✓ Form Factor 3 RU Rackmount 4 RU Rackmount <t< th=""><th>Collector Sustained Rate (logs/sec)*</th><th>60,000</th><th>90,000</th><th colspan="2">150,000</th></t<>	Collector Sustained Rate (logs/sec)*	60,000	90,000	150,000	
Options Supported FortiGuard Indicator of Compromise (IOC) Section (Indicator of Compromise (IDC) Sectio	Devices/VDOMs (Maximum)	4,000	10,000	10,000	
FortiGuard Indicator of Compromise (IOC)	Max Number of Days Analytics**	30	38	60	
Hardware Specifications A FUL Rackmount 4 RU Rackmount 4 RU Rackmount Total Interfaces 4 x GE, 2 x SPP+ 2 x GBE RJ45, 2x SPP28 2 x SPP+, 2 x 1GE Storage Capacity 48 TB (16 x 3 TB − 48 TB max) 96 TB (24 x 4 TB) 24 0 TB (60 x 4 TB SAS HD0s) Usable Storage (After RAID) 42 TB 80 2 16 TB Removable Hard Drives Image: Comparity of the Supported of RAID 071/5/6/10/50/60 RAID 071/5/6/10/50/60 RAID 071/5/6/10/50/60 RAID Type Hardware / Hot Swappable Hardware / Hot Swappable Hardware / Hot Swappable Default RAID Level 50 50 50 Redundant Hot Swap Power Supplies Image: Comparity of the Swappable of The	Options Supported				
Form Factor 3 RU Rackmount 4 RU Rackmount 4 RU Rackmount Total Interfaces 4 x GE, 2 x SFP+ 2 x GbE RJ45, 2x SFP28 2 x SFP+, 2 x 1GE Storage Capacity 48 TB (16 x 3 TB − 48 TB max) 96 TB (24 x 4 TB) 240 TB (60 x 4 TB SAS HDDs) Usable Storage (After RAID) 42 TB 80 216 TB Removable Hard Drives Image: Capacity RAID 01/56/610/50/60 RAI	FortiGuard Indicator of Compromise (IOC)			⊘	
Total Interfaces 4 x GE, 2 x SFP+ 2 x GbE RJ45, 2x SFP28 2 x SFP+, 2 x 10E Storage Capacity 48 TB (16 x 3 TB − 48 TB max) 96 TB (24 x 4 TB) 240 TB (60 x 4 TB SAS HDDs) Usable Storage (After RAID) 42 TB 80 216 TB Removable Hard Drives 80 216 TB RAID Levels Supported RAID 07/15/6/10/50/60 RAID 07/15/6/10/50/60 RAID 07/15/6/10/50/60 RAID Type Hardware / Hot Swappable Hardware / Hot Swappable Hardware / Hot Swappable Default RAID Level 50 50 50 Redundant Hot Swap Power Supplies 5 50 50 50 Redundant Hot Swap Power Supplies 5 7.0 x 17.2 x 26.0 7 x 17.2 x 30.2 7 x 17.2 x 30.2 Height x Width x Length (inches) 5.2 x 17.2 x 25.5 7.0 x 17.2 x 26.0 7 x 17.2 x 30.2 7 x 17.2 x 30.2 1 x x 43.7 x 64.8 1 x x 43.7 x 66.0 1 x 8 x 43.7 x 67.7 1 x x 43.7 x 66.0 1 x 8 x 43.7 x 67.7 1 x x 43.7 x 66.0 1 x 8 x 43.7 x 66.0	Hardware Specifications				
Storage Capacity 48 TB (16 x 3 TB — 48 TB max) 96 TB (24x 4 TB) 240 TB (60 x 4 TB SAS HDDs) Usable Storage (After RAID) 42 TB 80 216 TB Removable Hard Drives	Form Factor	3 RU Rackmount	4 RU Rackmount	4 RU Rackmount	
Usable Storage (After RAID) 42 TB 80 216 TB Removable Hard Drives C C C RAID Levels Supported RAID 0/1/5/6/10/50/60	Total Interfaces	4 x GE, 2 x SFP+	2 x GbE RJ45, 2x SFP28		
Removable Hard Drives Image: Control of the properties of the	Storage Capacity	48 TB (16 x 3 TB - 48 TB max)	96 TB (24x 4 TB)	240 TB (60 x 4 TB SAS HDDs)	
RAID Levels Supported RAID 0/1/5/6/10/50/60 AID 0/1/5/6/6/50/60 AID 0/1/5/6/6/50/60 AID 0/1/5/	Usable Storage (After RAID)	42 TB	80	216 TB	
RAID Levels Supported RAID 0/1/5/6/10/50/60 AID 0/1/5/6/6/50/60 AID 0/1/5/6/6/50/60 AID 0/1/5/	Removable Hard Drives	⊘	⊘	⊘	
Default RAID Level 50 50 50 Redundant Hot Swap Power Supplies ✓	RAID Levels Supported		RAID 0/1/5/6/10/50/60		
Dimensions Dimensions Height x Width x Length (inches) 5.2 x 17.2 x 25.5 7.0 x 17.2 x 26.0 7 x 17.2 x 30.2 Height x Width x Length (cm) 13.2 x 43.7 x 64.8 17.8 x 43.7 x 66.0 17.8 x 43.7 x 76.7 Weight 76 lbs (34.5 kg) 90.75 lbs (41.2 kg) 118 lbs (53.5 kg) Environment AC Power Supply 100-240V AC, 50-60 Hz, 11.5 Amp Maximum 100-240 VAC, 60-50 Hz 100-240V AC, 60-50 Hz Power Consumption (Average / Maximum) 449 W / 541W for 12 HDD 629.5W / 677.3W 850 W / 1423.4W Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50-95°F (10-35°C) 41-95°F (5-35°C) 50-95°F (10-35°C) Storage Temperature -40-158°F (-40-70°C) -40-140°F (-40-60°C) -40-158°F (-40-70°C) Humidity 8-90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	RAID Type	Hardware / Hot Swappable	Hardware / Hot Swappable	Hardware / Hot Swappable	
Dimensions Height x Width x Length (inches) 5.2 x 17.2 x 25.5 7.0 x 17.2 x 26.0 7 x 17.2 x 30.2 Height x Width x Length (cm) 13.2 x 43.7 x 64.8 17.8 x 43.7 x 66.0 17.8 x 43.7 x 76.7 Weight 76 lbs (34.5 kg) 90.75 lbs (41.2 kg) 118 lbs (53.5 kg) Environment AC Power Supply 100-240V AC, 50-60 Hz, 11.5 Amp Maximum 100-240 VAC, 60-50 Hz 100-240V AC, 60-50 Hz Power Consumption (Average / Maximum) 449 W / 541W for 12 HDD 629.5W / 677.3W 850 W / 1423.4W Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50-95°F (10-35°C) 41-95°F (5-35°C) 50-95°F (10-35°C) Storage Temperature -40-158°F (-40-70°C) -40-140°F (-40-60°C) -40-158°F (-40-70°C) Humidity 8-90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Default RAID Level	50	50		
Height x Width x Length (inches) 5.2 x 17.2 x 25.5 7.0 x 17.2 x 26.0 7 x 17.2 x 30.2 Height x Width x Length (cm) 13.2 x 43.7 x 64.8 17.8 x 43.7 x 66.0 17.8 x 43.7 x 76.7 Weight 76 lbs (34.5 kg) 90.75 lbs (41.2 kg) 118 lbs (53.5 kg) Environment AC Power Supply 100-240V AC, 50-60 Hz, 11.5 Amp Maximum 100-240 VAC, 60-50 Hz 100-240V AC, 60-50 Hz Power Consumption (Average / Maximum) 449 W / 541W for 12 HDD 629.5W / 677.3W 850 W / 1423.4W Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50-95°F (10-35°C) 41-95°F (5-35°C) 50-95°F (10-35°C) Storage Temperature -40-158°F (-40-70°C) -40-140°F (-40-60°C) -40-158°F (-40-70°C) Humidity 8-90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Redundant Hot Swap Power Supplies	igoremsize	Ø	***	
Height x Width x Length (cm) 13.2 x 43.7 x 64.8 17.8 x 43.7 x 66.0 17.8 x 43.7 x 76.7 Weight 76 lbs (34.5 kg) 90.75 lbs (41.2 kg) 118 lbs (53.5 kg) Environment AC Power Supply 100−240V AC, 50−60 Hz, 11.5 Amp Maximum Power Consumption (Average / Maximum) 449 W / 541W for 12 HDD 629.5W / 677.3W 850 W / 1423.4W Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50−95°F (10−35°C) 41−95°F (5−35°C) 50−95°F (10−35°C) Storage Temperature 40−158°F (-40−70°C) Humidity 8−90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Dimensions				
Weight 76 lbs (34.5 kg) 90.75 lbs (41.2 kg) 118 lbs (53.5 kg) Environment AC Power Supply 100–240V AC, 50–60 Hz, 11.5 Amp Maximum 100-240 VAC, 60-50 Hz 100–240V AC, 60–50 Hz Power Consumption (Average / Maximum) 449 W / 541 W for 12 HDD 629.5 W / 677.3 W 850 W / 1423.4 W Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50–95°F (10–35°C) 41–95°F (5–35°C) 50–95°F (10–35°C) Storage Temperature -40–158°F (-40–70°C) -40–140°F (-40–60°C) -40–158°F (-40–70°C) Humidity 8–90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Height x Width x Length (inches)	5.2 x 17.2 x 25.5	7.0 x 17.2 x 26.0	7 x 17.2 x 30.2	
Environment AC Power Supply 100–240V AC, 50–60 Hz, 11.5 Amp Maximum 100-240 VAC, 60-50 Hz 100–240V AC, 60–50 Hz Power Consumption (Average / Maximum) 449 W / 541W for 12 HDD 629.5W / 677.3W 850 W / 1423.4W Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50–95°F (10–35°C) 41–95°F (5–35°C) 50–95°F (10–35°C) Storage Temperature -40–158°F (-40–70°C) -40–140°F (-40–60°C) -40–158°F (-40–70°C) Humidity 8–90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Height x Width x Length (cm)	13.2 x 43.7 x 64.8	17.8 x 43.7 x 66.0	17.8 x 43.7 x 76.7	
AC Power Supply 100–240V AC, 50–60 Hz, 11.5 Amp Maximum 100–240 VAC, 60–50 Hz 100–240V AC, 60–50 Hz Power Consumption (Average / Maximum) 449 W / 541W for 12 HDD 629.5W / 677.3W 850 W / 1423.4W Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50–95°F (10–35°C) 41–95°F (5–35°C) 50–95°F (10–35°C) Storage Temperature -40–158°F (-40–70°C) -40–140°F (-40–60°C) -40–158°F (-40–70°C) Humidity 8–90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Weight	76 lbs (34.5 kg)	90.75 lbs (41.2 kg)	118 lbs (53.5Kg)	
Maximum Power Consumption (Average / Maximum) 449 W / 541 W for 12 HDD 629.5W / 677.3W 850 W / 1423.4W Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50–95°F (10–35°C) 41–95°F (5–35°C) 50–95°F (10–35°C) Storage Temperature -40–158°F (-40–70°C) -40–140°F (-40–60°C) -40–158°F (-40–70°C) Humidity 8–90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Environment				
Heat Dissipation 1846.5 BTU/h 2345.07 BTU/h 4858 BTU/h Operating Temperature 50–95°F (10–35°C) 41–95°F (5–35°C) 50–95°F (10–35°C) Storage Temperature -40–158°F (-40–70°C) -40–140°F (-40–60°C) -40–158°F (-40–70°C) Humidity 8–90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	AC Power Supply		100-240 VAC, 60-50 Hz	100-240V AC, 60-50 Hz	
Operating Temperature 50-95°F (10-35°C) 41-95°F (5-35°C) 50-95°F (10-35°C) Storage Temperature -40-158°F (-40-70°C) -40-140°F (-40-60°C) -40-158°F (-40-70°C) Humidity 8-90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Power Consumption (Average / Maximum)	449 W / 541W for 12 HDD	629.5W / 677.3W	850 W / 1423.4W	
Storage Temperature -40-158°F (-40-70°C) -40-140°F (-40-60°C) -40-158°F (-40-70°C) Humidity 8-90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Heat Dissipation	1846.5 BTU/h	2345.07 BTU/h	4858 BTU/h	
Storage Temperature -40-158°F (-40-70°C) -40-140°F (-40-60°C) -40-158°F (-40-70°C) Humidity 8-90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Operating Temperature	50-95°F (10-35°C)	41-95°F (5-35°C)	50–95°F (10–35°C)	
Humidity 8–90% non-condensing 8% to 90% (non-condensing) 8% to 90% (non-condensing)	Storage Temperature			-40–158°F (-40–70°C)	
Operating Altitude	Humidity	8–90% non-condensing			
	Operating Altitude	Up to 7,400 ft (2,250 m)	Up to 7,400 ft (2,250 m)	Up to 7,000 ft (2133 m)	

FCC Part 15 Class A, C-Tick, VCCI, CE, UL/ FCC Part 15 Class A, C-Tick, VCCI,

CE, UL/cUL, CB

cUL, CB

Compliance

Safety Certifications



FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB

^{*} Sustained Rate - maximum constant log message rate that the FAZ platform can maintain for minimum 48 hours without SQL database and system performance degradation.

^{**} is the max number of days if receiving logs continuously at the sustained analytics log rate. This number can increase if the average log rate is lower.

^{*** 3700}F must connect to a 200V - 240V power source.

Order Information

Product	SKU	Description
FortiAnalyzer 200F	FAZ-200F	Centralized log and analysis appliance — 2 x RJ45 GE, 4 TB storage, up to 100 GB/day of logs.
FortiAnalyzer 300F	FAZ-300F	Centralized log and analysis appliance — 2 x RJ45 GE, 8 TB storage, up to 150 GB/day of logs.
FortiAnalyzer 400E	FAZ-400E	Centralized log and analysis appliance — 4 x GE RJ45, 12 TB storage, up to 200 GB/day of logs.
FortiAnalyzer 800F	FAZ-800F	Centralized log and analysis appliance — 4 x GE, 2 x SFP, 16 TB storage, up to 300 GB/day of logs.
FortiAnalyzer 1000F	FAZ-1000F	Centralized log and analysis appliance — 2×10 GbE RJ45, 2×10 GbE SFP+, 32 TB storage, dual power supplies, up to 660 GB/day of logs.
FortiAnalyzer 2000E	FAZ-2000E	Centralized log and analysis appliance — 4 x GE RJ45, 2 x SFP+, 36 TB storage, dual power supplies, up to 1,000 GB/day of logs.
FortiAnalyzer 3000F	FAZ-3000F	Centralized log and analysis appliance — $4 \times GE$ RJ45, $2 \times SFP+$, 48 TB storage, dual power supplies, up to 3,000 GB/day of logs.
FortiAnalyzer 3500G	FAZ-3500G	Centralized log and analysis appliance — 2 x GbE RJ45, 2 x SFP28, 96 TB storage, dual power supplies, up to 5,000 GB/day of logs.
FortiAnalyzer 3700F	FAZ-3700F	Centralized log and analysis appliance — 2 x SFP+, 2 x 1GE slots, 240 TB storage, up to 8,300 GB/day of logs.
FortiAnalyzer-VM	FAZ-VM-BASE	Base license for stackable FortiAnalyzer-VM; 1 GB/Day of Logs and 500 GB storage capacity. Unlimited GB/Day when used in collector mode only. Designed for all supported platforms.
	FAZ-VM-GB1	Upgrade license for adding 1 GB/Day of Logs and 500 GB storage capacity.
	FAZ-VM-GB5	Upgrade license for adding 5 GB/day of logs and 3 TB storage capacity.
	FAZ-VM-GB25	Upgrade license for adding 25 GB/day of logs and 10 TB storage capacity.
	FAZ-VM-GB100	Upgrade license for adding 100 GB/day of logs and 24 TB storage capacity.
	FAZ-VM-GB500	Upgrade license for adding 500 GB/day of logs and 48 TB storage capacity.
	FAZ-VM-GB2000	Upgrade license for adding 2 TB/Day of Logs and 100 TB storage capacity.
FortiAnalyzer - Backup to Cloud Service	FC-10-FAZ00-286-02-DD	One year subscription to FortiAnalyzer storage connector service for 10TB data transfer to public cloud.
FortiGuard Indicator of Compromise (IOC) Subscription	FC-10-[Model code] -149-02-DD	1 Year Subscription license for the FortiGuard Indicator of Compromise (IOC).